

## Digital Cabinets Sandwich/Salad Preparation Table, 48" 12GN 1/6 containers- Stainless Steel (R290)

ITEM # \_\_\_\_\_  
MODEL # \_\_\_\_\_  
NAME # \_\_\_\_\_  
SIS # \_\_\_\_\_  
AIA # \_\_\_\_\_



738256 (TSSU48)

2-door sandwich/salad preparation table for 12 GN 1/6 containers, 48", R290 refrigerant gas, +33/+41°F, stainless steel

### Short Form Specification

#### Item No.

2-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back and top panels in painted aluminium, interior bottom panel in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board of 79x46.69x10.55 in.

Digital control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.



### Main Features

- External temperature display.
- Removable door gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Digital Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.


### Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 12 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

APPROVAL: \_\_\_\_\_

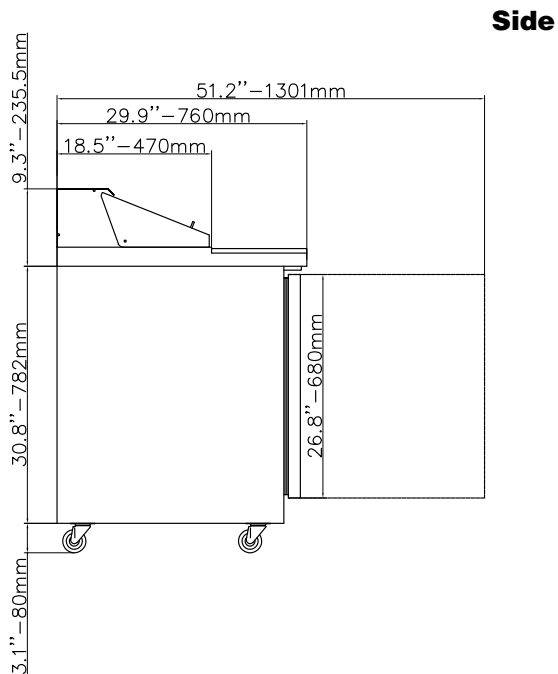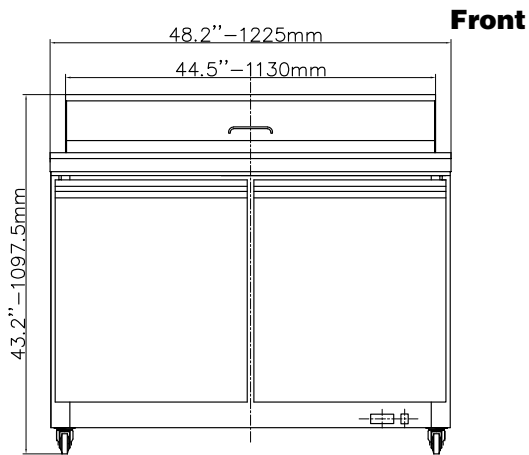

**EI** = Electrical connection  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

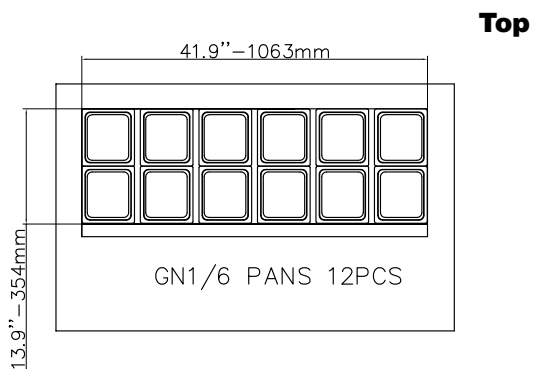

## Electric

### Supply voltage:

738256 (TSSU48) 115 V/1 ph/60 Hz

### Electrical power, max:

724.5 kW

### Plug type:

USA NEMA 5-15P

## Key Information:

### Gross capacity:

339.8016 lt

### Door hinges:

### External dimensions, Width:

48 1/4" (1225 mm)

### External dimensions, Depth:

29 15/16" (760 mm)

### External dimensions, Height:

43 1/4" (1098 mm)

### Number and type of doors:

2 Full

### Number and type of grids (included):

2 - 538x425

### Type of external material:

Stainless Steel

### Type of internal material:

Polystyrene

### Warranty:

3 / 5 years

## Refrigeration Data

### Compressor power:

### Refrigerant type:

R290

### Operating temperature min.:

33.01 °F

### Operating temperature max.:

41 °F

### Condenser type:

Fin & tube

### Defrost type:

Auto Defrost