

Refrigeration Equipment 1-Door 1-Tower Draft Box 24 " Long

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738295 (KCHBBD1D1T)

1-Door 1-Tower Draft Box 24
" Long

Short Form Specification

Item No.

1-door Beer dispenser with 1 column. Exterior back and bottom panels in galvanized steel, top panel in 304 stainless steel and exterior side panels in painted steel; interior back, side, and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments.

Automatic Defrost Cooling System and temperature control.

R600a gas in refrigeration circuit.

ETL Safety and Sanitation certified.

3/5 Years warranty.

Main Features

- External digital temperature display.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- External temperature display.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Self-closing door with 90-degree stay-open feature.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty casters.

Sustainability


- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories


- Draft Tower; Double Faucet PNC 880677 ☐

APPROVAL: _____

Front

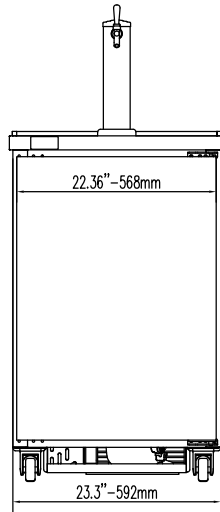


Side

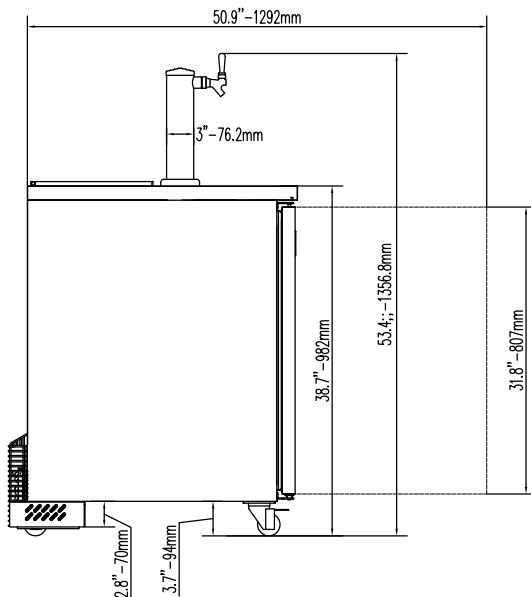

El = Electrical connection

Top

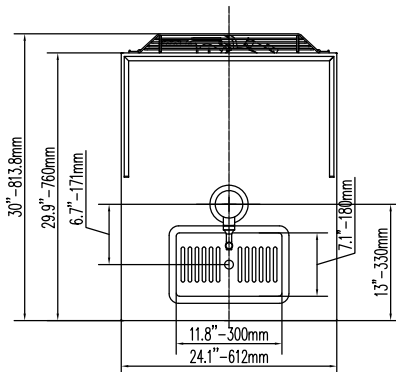

Electric

Supply voltage:

738295 (KCHBBD1D1T)

115 V/1 ph/60 Hz

Electrical power, max:

0.31 kW

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity:

9 cu.feet

Number and type of grids (included):

Key Information:

Door hinges:

Right Side

External dimensions, Width:

24 1/16" (612 mm)

External dimensions, Depth:

32 1/16" (813.8 mm)

External dimensions, Height:

53 7/16" (1356.8 mm)

Number and type of doors:

1 Full

Internal Dimensions (depth):

19 1/2" / (495.3 mm)

Internal Dimensions (height):

25 " / (635 mm)

Internal Dimensions (width):

19 1/2" / (495.3 mm)

Shipping height:

55 1/8" (1400 mm)

Shipping weight:

198 lbs (90 kg)

Shipping volume:

28.28 ft³ (0.8 m³)

Type of external material:

Black Prepainted Steel

Type of internal material:

Stainless Steel

Warranty:

3 / 5 years

Approvals

ETL C&US;ETL SANITATION

Refrigeration Data

Current absorbed:

2.2 Amps

Compressor power:

1/8 hp

Operating temperature min.:

32 °F

Operating temperature max.:

41 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost

Sustainability

Refrigerant type:

R600a

GWP Index:

3

Refrigerant weight:

90 g